

H68 brass strip tape

Brass factory, more than 10 years manufacture experience, attained ISO9001, work on OEM and ODM projects..

1. Introduction of the H68 brass strip tape

H68 / C26800 / CuZn33 has a very similar performance with H70, It is used for complex cold stamping and deep drawing parts, such as radiator shell, shell pipe, corrugated pipe, and gasket.



2. Grade and temper for H68 brass strip tape

Grade: C2680, C26800, CDA268, C268, CZ107, H68, CuZn33

Temper: O(M), 1/4H(Y4), 1/2H(Y2), H(Y), HH(T)

Different countries' Standard comparison table of brass

GB	DIN		EN		ISO	UNS	JIS
H96	CuZn5	2.0220	CuZn5	CE500L	CuZn5	C21000	C2100
H90	CuZn10	2.0230	CuZn10	CW501L	CuZn10	C22000	C2200
H85	CuZn15	2.0240	CuZn15	CW502L	CuZn15	C23000	C2300
H80	CuZn20	2.0250	CuZn20	CW503L	CuZn20	C24000	C2400
H70	CuZn30	2.0265	CuZn30	CW505L	CuZn30	C26000	C2600
H68	CuZn33	2.0280	CuZn33	CW506L	CuZn35	C26800	C2680
H65	CuZn36	2.0335	CuZn36	CW507L	CuZn35	C27000	C2700
H63	CuZn37	2.0321	CuZn37	CW508L	CuZn37	C27200	C2720

Address: No.16 Shuanggang street, Tangchun Village, Liaobu Town, 523407 Dongguan , Guangdong, China

Phone: +86-769-89800565

E-mail:sales@intmc.com

3. Chemical composition of H68 brass strip tape

Chemical composition

Cu : 65~70
 Zn: balance
 Pb: ≤0.03
 Pb: ≤0.03
 P: ≤0.01
 Fe: ≤0.10
 Sb : ≤0.005
 Bi: ≤0.005
 impurity: ≤0.3

4. Dimension and tolerance of H68 brass strip tape

Width mm	Thickness mm					
	≤1.0		>1.0~1.5		>1.5~2.5	
	Thickness tolerance / ± mm					
	Ordinary Level		Ordinary Level		Ordinary Level	
≤100	0.2		0.3		0.4	
>100~300	0.3		0.4		0.5	
>300~600	0.5		0.6		0.6	
>600~1000	0.8		0.8		0.8	

5. Characteristics of H68 brass strip tape

		Tensile Strength	Yield Offset	Elongation	Hardness
		<i>x 1000 P.S.I.</i>	<i>0.2% offset x 1000 P.S.I.</i>	<i>% in 2 Inches</i>	<i>.020 Gauge and Above</i>
M20	Ann	41 - 61	23 Nom.	50 - 52	-
H01	1/4H	49 - 59	34 Nom.	40 Nom.	B 40 - 65
H02	1/2H	55 - 65	44 Nom.	25 Nom.	B 57 - 74
H03	3/4H	62 - 72	53 Nom.	17 Nom.	B 70 - 80

H04	Hard	68 - 78	57 Nom.	8 Nom.	B 76 - 84
H06	Ex-H	79 - 89	67 Nom.	4 Nom.	B 83 - 89
H08	Spring	86 - 95	71 Nom.	2 Nom.	B 87 - 92
H10	Ex-Spring	90 - 99	75 Nom.	-	B 88 - 93

6. Application of H68 brass strip tape

C2680 H68, CuZn33 brass is used for complex cold stamping and deep drawing parts, such as radiator shell, shell pipe, corrugated pipe, and gasket. etc.

7. Manufacture plant of H68 brass strip tape



8. Tests and inspection for H68 brass strip tape

Test instrument : Metallographic Microscope; Digital Light Processor; Strength Tester; Hardness Tester.



9. Quality certificate for H68 brass strip tape

CERTIFICATE



10. Packing and shipping for H68 brass strip tape


Packing:

First wrapped by anti-rust paper, second wrapped by plastic film, then packed by wooden box or wooden pallet ..

Address: No.16 Shuanggang street, Tangchun Village, Liaobu Town, 523407 Dongguan , Guangdong, China

Phone: +86-769-89800565

E-mail:sales@intmc.com

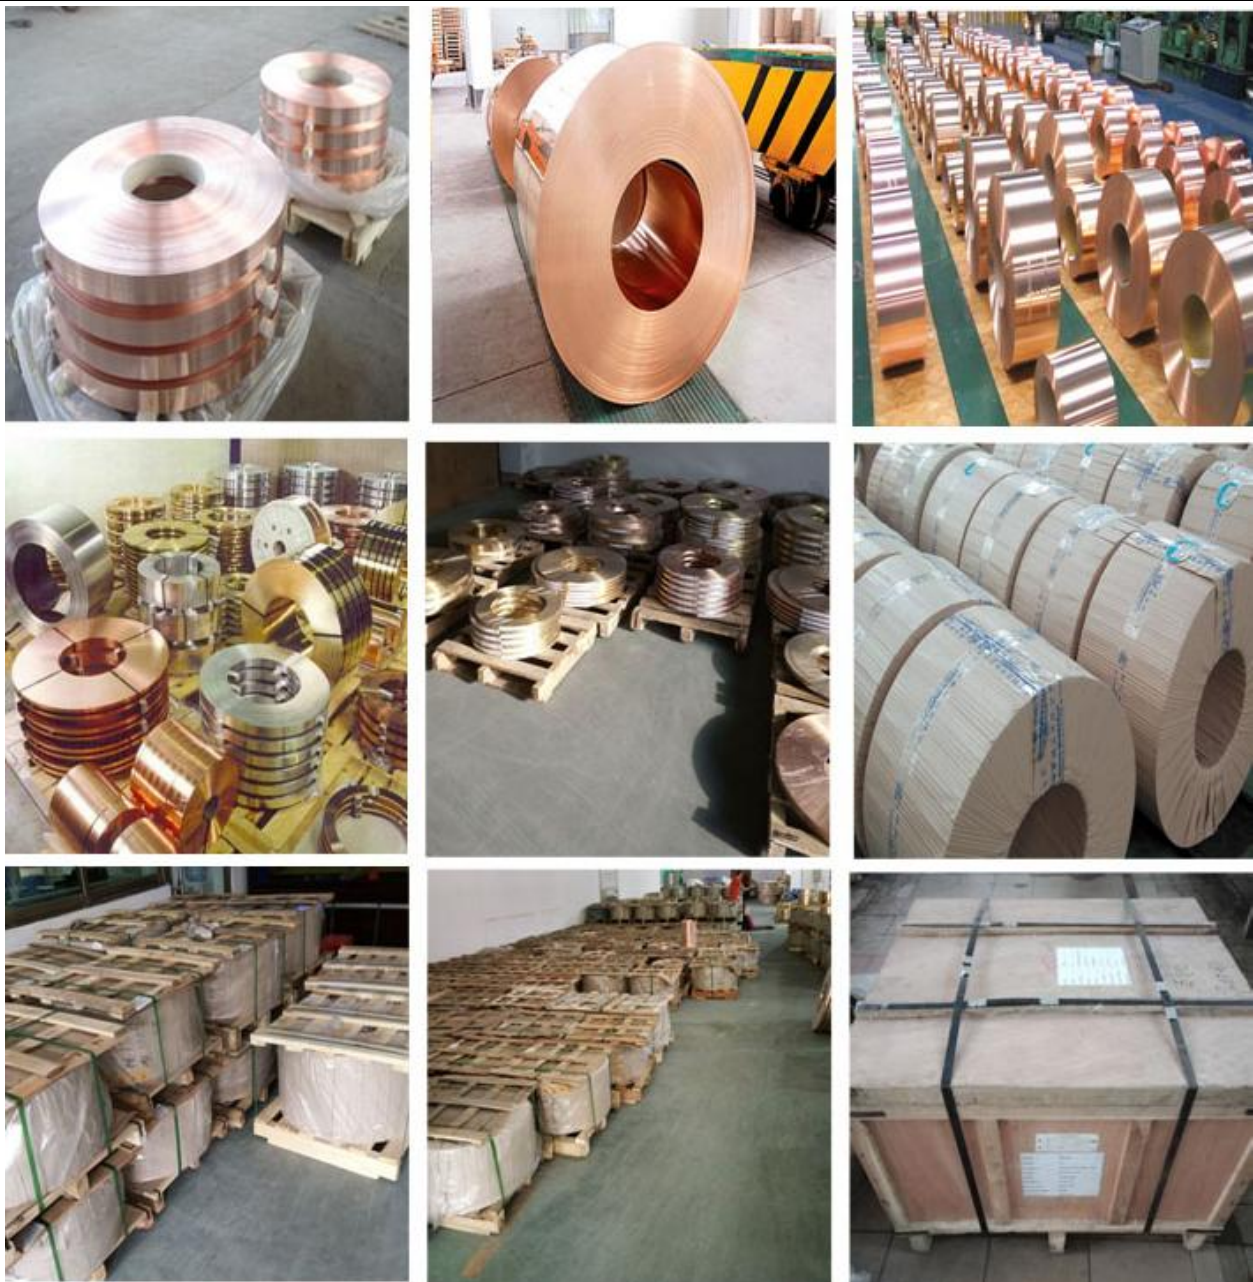

Shipping:

We will choose the best way according to customer's requests.

1. By Air, to the indicated airport.
2. By Express (FedEx, UPS, DHL, TNT, EMS), to the indicated address.
2. By Sea, to the indicated sea port.



11. Questions and Answers

a1. Do you have ISO certificate?

Yes, we obtained ISO9001

a2. How long is your delivery time for H68 brass strip?

If the master coil is available, 3-7 days do slitting will be ready , if not, will need 20-25 days for new production.

a3. Can you help us to choose suitable material?

Yes, we can recommend the most suitable material according to your application.

a4. How do you control quality?

We produce strictly according to customer's drawings and requests, here are strict control plan in every process, full check of each parts, strive to provide customer 100% quality products, ROHS/SGS test report, material certificate are available.

a5. Do you provide sample? Free or charge?

Yes, if the sample in stock available, free of charge, if not, need to charge some mfg cost.